

4002ALM-HL, TC or RTD Dual Setpoint Trip Amplifier



- **Wide range of user configurable inputs**
- **Configurable trip action and fail-safe mode**
- **Optional isolated re-transmission**
- **Purely analogue design**
- **Optional LED display or 0-10V signal of input and setpoints, DC or AC voltage supply**

DESCRIPTION

The 4002ALM trip-amplifier can accept a wide range of inputs including 4-20mA, thermocouple, RTD and voltage types. The unit can have up to two relay outputs and each can operate as a high or low trip. The unit can also produce an isolated high level output.

The relay outputs are single pole change-over relays with mains voltage rating. Each trip can be configured so that the alarm condition can be above or below the setpoint. The relays can be energised or de-energised in the alarm condition, satisfying fail-safe and non-fail safe applications.

In addition the alarm LED's can be selected to light when the relay is either on or off.

The input stage can be isolated as an option and the inputs can be user-reconfigured for several different ranges if specified at point of order. In addition there is an optional isolated transmitter supply of 24Vdc, suitable for exciting most standard 4-20mA transmitters.

The following applications are also possible:

One output relay is energised when the input reaches the high setpoint and is latched on until the lower setpoint is reached. The reverse operation is also possible. This is ideal for applications such as pumping out. All the above options are user-configurable but can be specified at point of order.

The power supply can be 24Vdc or 110 / 240 Vac.

Outputs

Mains Rated Relays

3A resistive at 240V ac

DC Current and Voltage

0-20mA, 4-20mA, 0-10mA into 750Ω

0-1V, 0-10V, 1-5V into a minimum 2kΩ

Inputs

The input types and ranges included below are our standard ones only. Contact Sales for others.

4002ALM-HL for DC Current and Voltage

0-20mA, 4-20mA, 0-10mA into 15Ω / 30Ω

0-1V, 0-10V, 1-5V into 100kΩ / 1MΩ

Min and Max Full Scale Ranges:

DC Current 0 to 50μA 0 to 10A

DC Voltage 0 to 100mV 0 to 300V

Note: For input voltages greater than 30Vac or 60Vdc an IIR-Divider unit must be specified.

4002ALM-TC for Thermocouples

Types E,J,K,N,R,S & T non-linearised

Ranges 0-250, 0-500, 0-1200°C (Others available)

Auto cold junction compensation. Open cct t/c can drive either upscale or downscale.

4002ALM-RTD for Resistance Thermometers

2 or 3 wire PT100 or other, linearised output

Ranges 0-250, 0-500, -100-100°C (Others available)

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset, BH21 7PE
Telephone: +44 (0)1202 897969

Email: c3w_sales@sensata.com

ISO9001 CERTIFIED

cynergy3-4002-alm-rtd-fc-v2



www.cynergy3.com


4002ALM-HL, TC or RTD Dual Setpoint Trip Amplifier

Digital Inputs Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	110Vac		240Vac	24Vdc also available
Input Impedance (Volt)	100kΩ	1MΩ	10mΩ	Dependent on range (Typ=10V)
Input Impedance (mA)	0.02Ω	15Ω	5kΩ	Dependent on range (Typ=20V)
Volt drop (mA input)		0.3	0.35	At 20mA input on 0(4) to 20mA range
Trip Point Accuracy			±0.25%	
Temp Coefficient			±100ppm/°C	
Trip Point Drift			±100ppm/°C	
Relay Response Time		10ms		Signal response 300ms for T/C, 30ms others
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage	1kV			
Surge Voltage	2.5kV for 50µs		Transient of 10kV / µs	

Notes

Setpoints are adjusted by 20 turn potentiometers on the front panel.
 Setpoints can be checked by measuring 0-10V (0-100%) voltage on the front panel terminals.
 H/H,H/L, L/H, LL, fail-safe, non-fail safe and LED options are user selectable using internal links.
 Hysteresis is set at 1.0% but other values are possible, please specify if required.
 The process input level is available as 0-1V (0-100%) on front panel or on 3 digit LED Display.
 Figures based on HL version, 20°C ambient

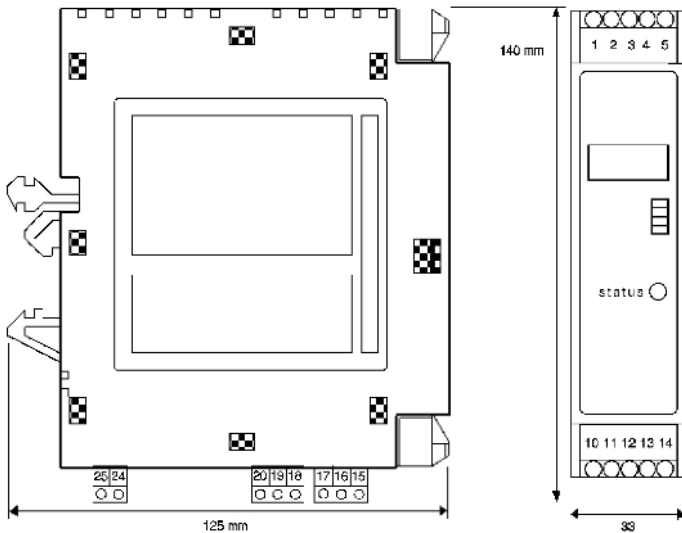

Installation Data

Mounting	DIN Rail TS32/35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 360g

Connection Details

10. Input -ve	T/C -ve	RTD -ve
11. Input +ve	T/C +ve	RTD +ve
12.	T/C Shield	RTD 3 rd Wire
1. Output -ve	15. Relay 1 N/C	
2. Output +ve	16. Relay1 N/O	
	17. Relay 1 Common	
24. Power Input -ve		
25. Power Input +ve	18. Relay 2 Common	
13. Trans Supply -ve	19. Relay 2 N/C	
14. Trans Supply +ve	20. Relay 2 N/O	

Ordering Information

Please supply:	
Part Number:	II-4002ALMHL-AXXX-4AB
Input Type:	e.g mA, Volt, T/C, RTD
Input Range:	e.g 4-20, 0-10, 0-500°C
Trip Action 1:	e.g RLY1>SP1<LED1
Trip Action 2:	e.g RLY2<SP2>LED2
Power Supply:	e.g 110/240Vac or 24Vdc
Retransmission:	Yes / No (e.g 4-20mA)
LED Display:	Yes / No
Further Notes:	