

SC-2002ALM-HL DUAL TRIP AMPLIFIER



The SC-2002ALM-HL trip amplifier can accept a wide range of user configurable inputs including 4-20mA, 0-20mA, 0-5V and 0-10V. The unit can have up to two relay outputs and each can operate as a high or a low trip; alternatively latching operation using both trip points can be configured.

The relay outputs are single pole changeover relays with mains voltage rating. Each trip can be configured so that the alarm condition can be above or below setpoint. The relays can be energized or de-energized in the alarm condition, satisfying fail-safe and non-fail-safe applications. In addition the alarm LEDs can be selected to light when the relay is either on or off. All these options are user-configurable using internal DIP switches. This minimizes the number of spare units required.

The input stage is fully isolated and the high level input current or voltage and range may be configured. Separate products are available for thermocouple and RTD inputs.

Features

- Wide Range of User Configurable Inputs
- 2 Setpoints with Configurable Trip Action & Fail-safe mode
- Isolated Input Stage
- Setpoints Available as 0-10V, (0-100%) on terminals 9 & 12
- D.C or A.C. Power Supply Options, See SC-4002-ALM for Main Version

Inputs

SC-2002ALM-HL Standard Ranges

0-20mA, 4-20mA, 0-10mA into 12Ω/15Ω/24Ω
0-5V, 0-10V into 1MΩ

Min and Max Full Scale Ranges available to order:

DC Current	0 - 1mA	0 - 5A
DC Voltage	0 - 100mV	0 - 300V

Note: For input voltages greater than 60Vdc a Divider unit must be specified.

Outputs

Mains Rated Relays - 3A resistive at 240V ac

Technical

Parameter	Min	Typ	Max	Comments
Supply Voltage (V)		24V		
Supply Current (mA)			45	24Vdc supply, both relays energized
Volt Drop (mA input)		0.3	0.35	At 20mA input
Input Impedance (Volt)	100kΩ	1MΩ	10MΩ	Dependent on range (Typ=10V)
Input Impedance (mA)	0.02Ω	15Ω	5kΩ	Dependent on range (Typ=4-20mA)
Trip Point Accuracy			0.25%	
Trip Point Drift			±100ppm/°C	
Temp Coefficient			±100ppm/°C	
Hysteresis		1% span		
Time Constant (10-90%)		10ms		
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage*	1kV			
Surge Voltage	2.5kV for 50μS			Transient of 10kV/μS

*Notes: Setpoints are adjusted by 20 turn potentiometers on the front panel. Setpoints can be checked by measuring the 0-10V (0-100%) voltage on terminals 9 & 12 H/H,H/L, L/H, LL, fail-safe, non-fail safe and LED options are user selectable using internal links. Hysteresis is set at 1.0% but other values are possible, please specify if required.

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 120g


Connection Details

10. Power Input -ve	
11. Power Input +ve	
7. Process Input -ve and Setpoint common	
8. Process input +ve	
9. Setpoint 1 (0-10V = 0-100%)	
12. Setpoint 2 (0-10V = 0-100%)	
1. Relay 1 Common	4. Relay 2 Common
2. Relay 1 N/C	5. Relay 2 N/C
3. Relay 1 N/O	6. Relay 2 N/O



DIMENSIONS

All dimensions are in millimeters.

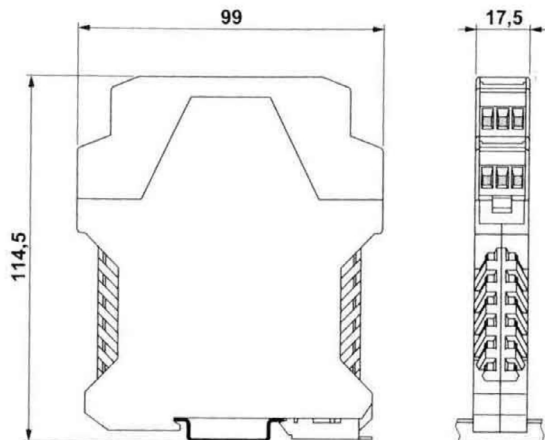



Please supply

Part Number SC-2002ALM-HL

Made in the UK

Page 3

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969
c3w_sales@sensata.com
Cynergy3 Components Ltd.
7 Cobham Road,
Ferndown Industrial Estate,
Wimborne, Dorset,
BH21 7PE, United Kingdom