




| 6 SERIES

MINIATURE FULLY SCREENED 4A, 3.5KV

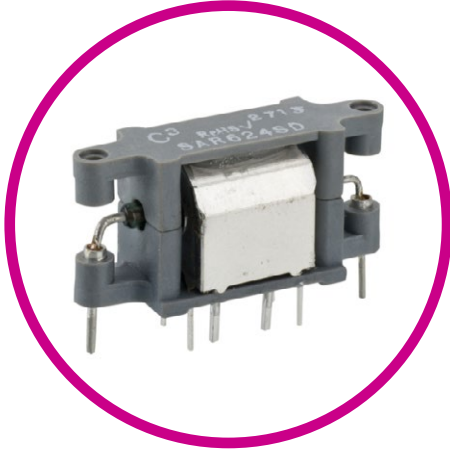

A fully screened relay offering low RF loss and high current carrying capacity. Developed with RF engineers in the radio communications industry.

The relay coil is totally enclosed in a copper screen, resulting in lower self heating and RF loss.

Rhodium contacts are used in the vacuum reed switches, yielding higher carry currents for a given frequency and ambient temperature.

Coil connections are via PCB and RF connections can be either via PCB or flying lead.

Available with SPNO (Form A), SPNC (Form B) or latching (Bistable) switching action.

Features

- Excellent RF characteristics - Low RF losses
- 4A Carry current (up to 30MHz)
- 3.5kV Isolation
- Custom versions can be designed to meet particular applications
- Long life expectancy



SPECIFICATIONS

Contact	Units	Condition			
Contact Material			Rhodium	Rhodium	Rhodium
Switch Action			SPNO	SPNC	Bistable
Carry Current Max	A	RMS@30MHz	4.0*	4.0*	1.5*
Switching Current	A	DC max	0.5	0.5	0.5
Switching Power	W	max	10	10	10
Switching Voltage Max	V	DC or AC peak	20	20	20
Isolation Across Conacts	kV	DC or AC peak	3	3	3.5
Capacitance	pF	coil/screen gnd	<0.1	<0.1	<0.1
Contact Connections		pin position	3 & 4	3 & 4	3 & 4
Lifetime	operations	dry switching	10 ⁹	10 ⁹	10 ⁹
Contact Resistance	mΩ	max	80 (30)	80 (30)	80 (30)
Insulation Resistance	mΩ	max (typical)	10 ¹⁰ (10 ¹³)	10 ¹⁰ (10 ¹³)	10 ¹⁰ (10 ¹³)

*see Graphical Data on page 3.

Coil at 20°C	Units	Condition								
Operating Voltage	V	Nominal	5	12	24	5	12	24	5	12
Must Operate Voltage	V		3.5	8	15	3.5	8	15	3	8
Must Release Voltage	V		1	2	4	1	2	4	Min Pulse	2ms
Resistance	Ω	Nominal	70	380	1500	65	350	1200	100 Set/Rest	500 Set/Rest
RF Screening			Full			Full			Full	
RF Screening Connection		pin position	1, 2, 5, 9			1, 2, 5, 9			1, 2, 5, 9	
Coil Connection		pin position	6 & 8			6 & 8			Set=6,7	Reset=7,8
Relay										
Construction			Covered			Covered			Covered	
Operate Time	ms	max incl bounce	1.0			1.0			1.0	
Release Time	ms	max incl bounce	0.5			0.5			N/A	
Isolation Contact to all other Terminals	kV	DC max	3			3			3	
Isolation Contact to Screen	V	DC max	250			250			250	
Environmental Conditions										
Storage Temperature	°C	range	-40 to +125							
Operating Temperature	°C	limited current	-40 to +100*							
Weight	gm	typical	5.3			6.1			5.0	

STANDARD PARTS

	Action	Carry Current A	Coil Voltage V	Isolation kV
SAR605SD	SPNO	4	5	3
SAR612SD	SPNO	4	12	3
SAR624SD	SPNO	4	24	3
SLR612SD	Bistable	1.5	12	3.5


Please refer to this document for circuit design notes:

<https://www.cynergy3.com/blog/reed-relay-application-notes>





DIMENSIONS



All dimensions are in millimeters.

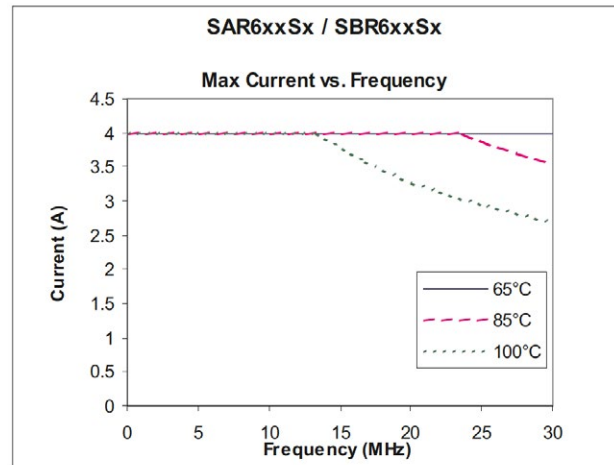


Flying Lead



PCB Mount




Pins 3, 4 require
1mm diameter ± 0.05 holes




The following Pins require 0.9mm
diameter ± 0.05 mm holes, where
fitted 1, 2, 5, 6, 7, 8, 9


Circuit diagram, Form A



Circuit diagram, Form B



Circuit diagram, Latching



Please refer to this document for circuit design notes:
<https://www.cynergy3.com/blog/reed-relay-application-notes>



ORDERING OPTIONS

Example : SAR612SD

	S	A	R	6	12	S	D
Reed Switch Size							
Contact Form							
A = SPNO B = SPNC L = Bistable							
Contact Material							
R = Rhodium							
Relay Series Number							
Coil Voltage							
05 = 5V 12 = 12V 24 = 24V							
RF Screening							
S = Screened N = Unscreened							
RF Connection							
D = via PCB U = via Fly Lead							

Made in the UK

Page 4

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969
csupport@sensata.com
Cynergy3 Components Ltd.
7 Cobham Road,
Ferndown Industrial Estate,
Wimborne, Dorset,
BH21 7PE, United Kingdom