

SC-ISOSLICE-9

ISOLATED BUS I/O MODULE



The SC-ISOSLICE-9 isolated Bus I/O module combines full three-port isolation with access to an industrial bus. This bus connects to the SC-E-100 modules which are then used to transmit the process values via either an Ethernet or a RS232/485 wired communications network.

Full 3-port isolation is standard.

The SC-ISOSLICE-9 is designed to accept current inputs from Current Transformers with current outputs.

Non-interactive zero and span controls make adjustment and calibration of the unit quick and simple.

The units have a wide ranging 12 to 36 Vdc.

This supply can either be wired to the appropriate terminals or picked up automatically from the Bus connector.

Features

- 4 off AC Current Inputs
- Communicates to Ethernet / RS232 or RS485 network via an SC-E-100 unit
- Input/Output/Power Supply Isolation
- Automatic Bus & Power Connection Via DIN Rail Bus Connector
- Multiple inputs in one module
- Very High Accuracy, Low Cost

Inputs

AC Current

AC Current ranges
0-1Aac

Min & Max Full Scale Ranges are:

DC Current	0-100mA	0 – 1A
AC Current	0-100mA	0 – 1A

Outputs

For Output Modules see SC-ISOSLICE-6 or SC-ISOSLICE-8

Technical

Parameter	Min	Typ	Max	Comments
Supply Voltage	12V	24V	36Vdc	
Supply Current (mA)		45	90	For 24Vdc supply (260mA for 50mS on start-up)
Bus Connection				16-bit bus connection
Volt Drop		0.3		At 5A ac Input
Input Impedance (A)		0.2Ω		Dependant on range (typ=0-1A)
Temp Coefficient			±50ppm/°C	
Time Constant (10-90%)		200mS		
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage*	1kV			
Surge Voltage	2.5kV for 50μS		Transient of 10kV/μS	

*Notes: Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Device is protected against reverse polarity connection. Accuracy figures based on 24Vdc supply, 4-20mA output with 250Ω load and an ambient 20°C.


Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 95g



DIMENSIONS

All dimensions are in millimeters.

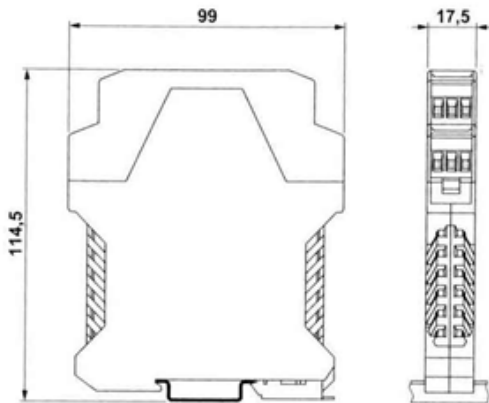

Part Number	Universal Inputs	mA or V Inputs	RTD Inputs	T/C Inputs	Analogue Outputs	Digital Inputs	Digital Outputs
SC-ISOSLICE-1	2						
SC-ISOSLICE-2		8					
SC-ISOSLICE-3			4				
SC-ISOSLICE-4				4			
SC-ISOSLICE-5						8	
SC-ISOSLICE-6							4
SC-ISOSLICE-7						2 x freq in	
SC-ISOSLICE-8					4		
SC-ISOSLICE-9	4 x AC I/V						



Please supply

Part Number SC-ISOSLICE-9

Made in the UK

Page 3

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969
c3w_sales@sensata.com
Cynergy3 Components Ltd.
7 Cobham Road,
Ferndown Industrial Estate,
Wimborne, Dorset,
BH21 7PE, United Kingdom